

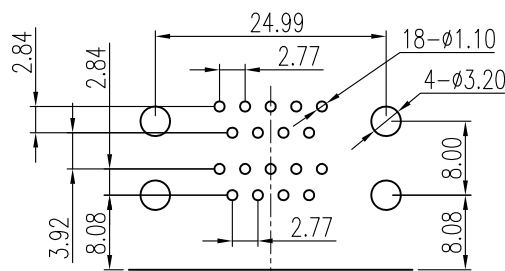
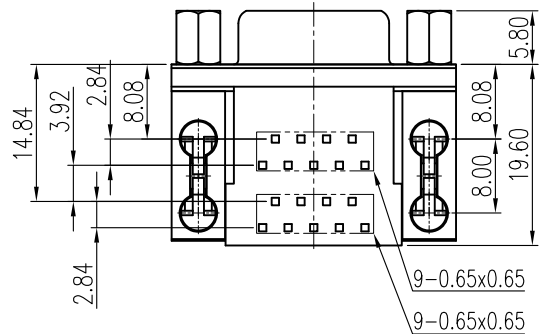


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

Customer Drawing

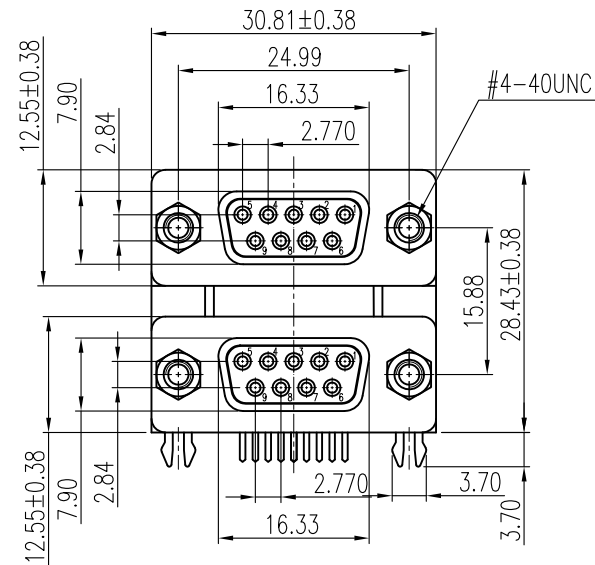

RECOMMENDED P.C.B. LAYOUT
TOLERANCE:±0.05MM

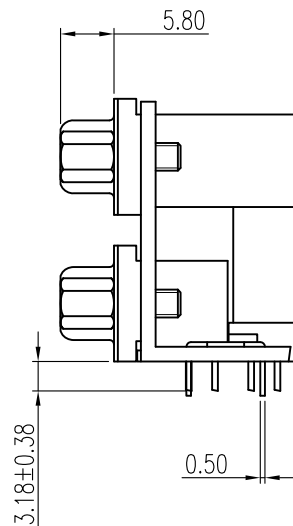


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK--	First Release Drawing	05/31/18	IP

D-SUB TECHNICAL DATA

SHELL : SPCC, 100u" min Tin over 50u" min Nickel over 50u" min Copper
BODY : PBT UL 94V-0 Color: Black
CONTACTS : Copper Alloy
Selective Gold plated over 50u" min Nickel on mating area.
100u" min Tin over 50u" min Nickel on solder area.
BOARDLOCK: Copper alloy, Tin plated.
BRACKET: Zinc alloy, Nickel plated.
SCREWLOCK: Copper alloy, Nickel plated.
ELECTRICAL : Voltage rating 250 V Rms
Current rating 3A.
Withstanding Voltage >1000 V Rms
Insulation resistance >1000 M Ohms
Contact resistance 25 mOhms max.

PRODUCT CODE

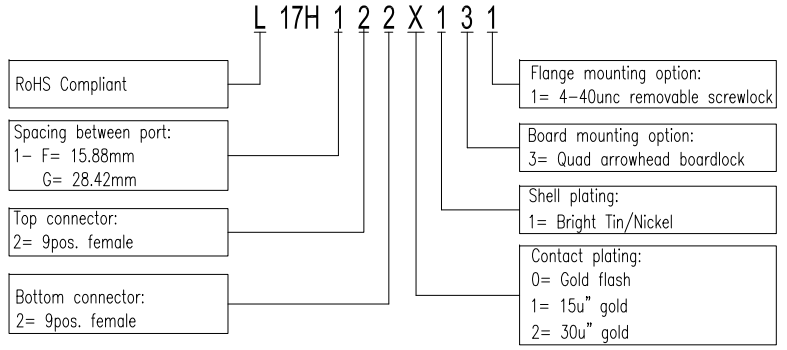

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	DATE
U.S.	METRIC	DRAWN	Stemon Chen
.X +/-	0.50	CHECKED	Tony Tang
.XX +/-	0.30	CHECKED	
.XXX +/-	0.20		
FRACTIONS +/-			
ANGLES +/-	5°		
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :	
REMOVE SHARP EDGES		ANGLE OF PROJECTION	
DIMENSIONS			
U.S.	INCHES		
METRIC	MM		

Amphenol			
TITLE			
D-SUB connector, Dual Port Series			
SIZE	DRAWING NO.	REV.	
A4	L17H122X131	1	
SCALE	NONE	SHEET 1 OF 1	