

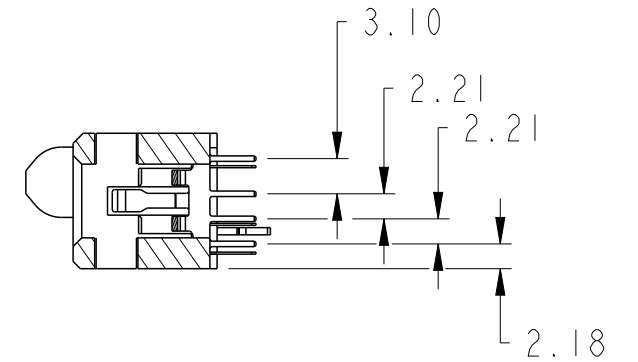
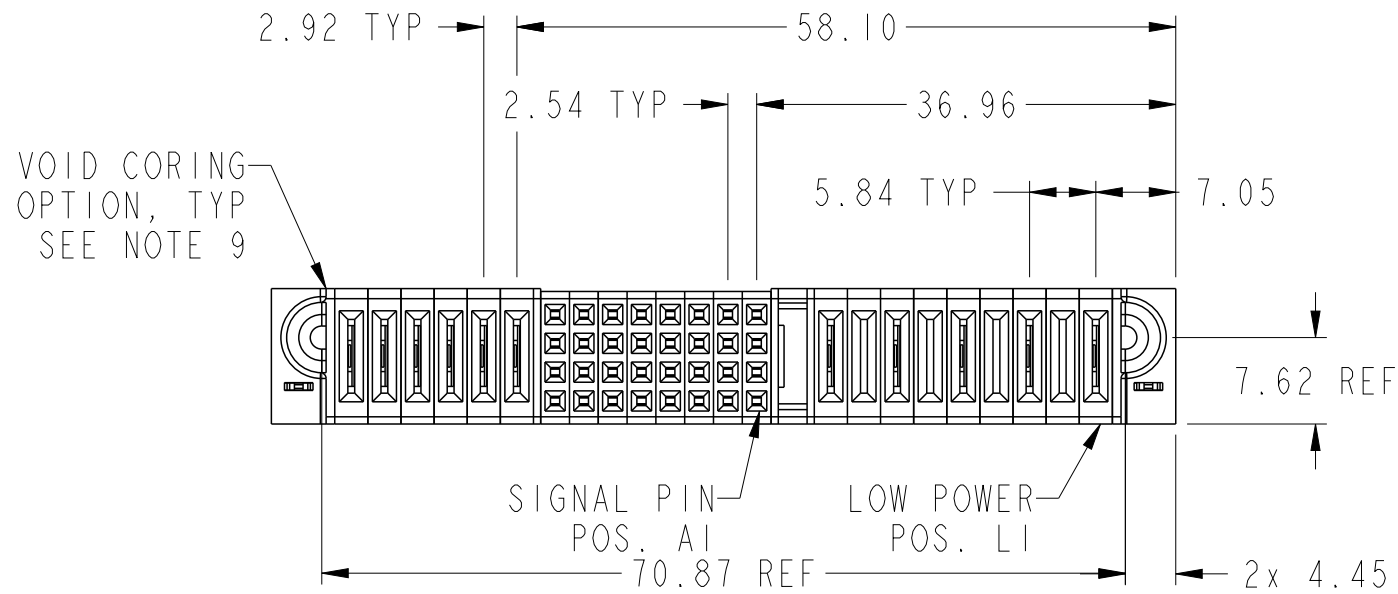
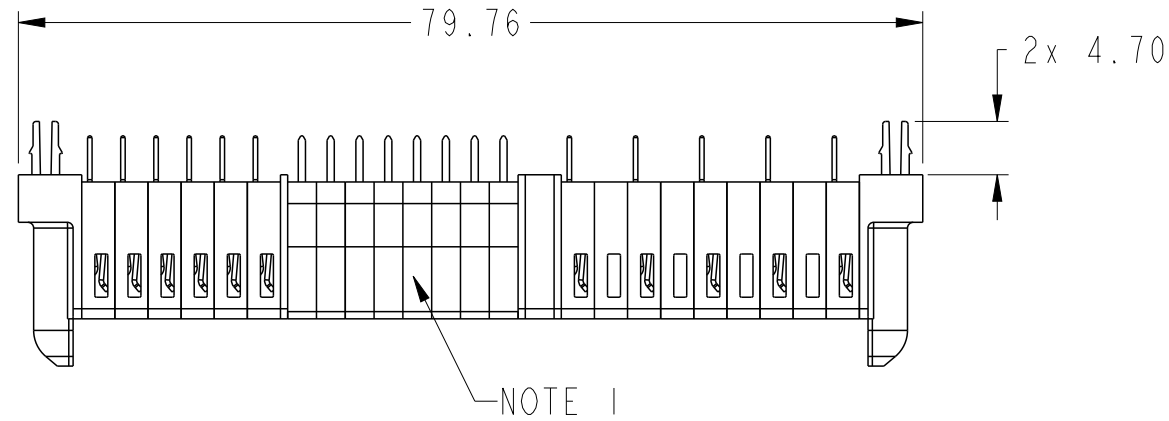


PRODUCT NUMBER SEE SHEET 2

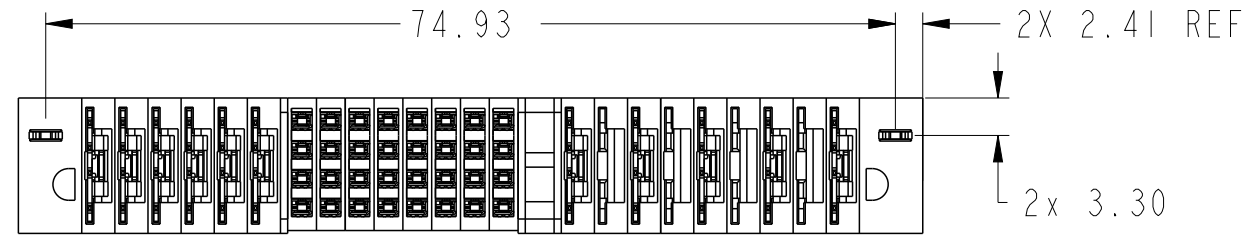

SECTION Z-Z

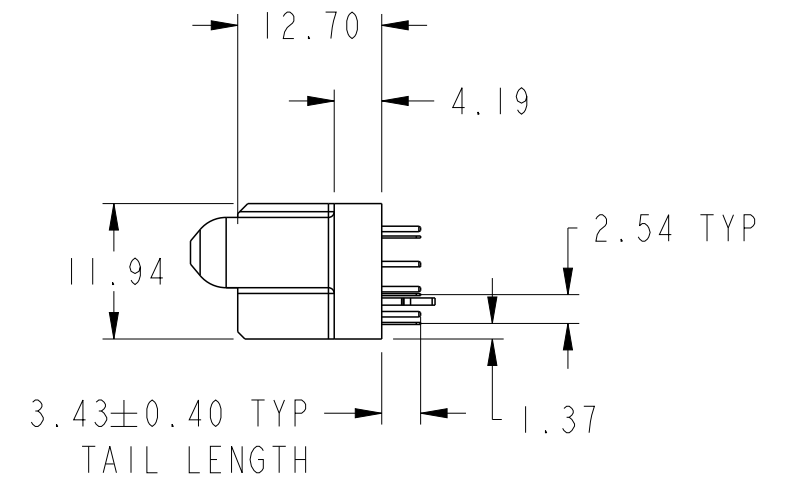

spec ref				dr		Zhan Rainbow	2017/06/01	projection		MM	size	A3	scale	3:2
tolerance std				eng		Zhan Rainbow	2017/06/07					ecn no		
ISO 406 ISO 1101				chr		Fancy Zhang	2017/06/07				rel level			Released
TOLERANCES UNLESS OTHERWISE SPECIFIED				appr		Pei-Ming Zheng	2017/06/07	product family			PowerBlade+			
surface	linear	0.X	±0.50		title 9LP + 32S + 6LP VT STB RECEPTACLE				dwg no	10106268-0F08001			rev	A
		0.XX	±0.25											
		0.XXX	±0.10											
	ISO 1302	angular	0°	±2°	www.fci.com	cat. no.		Product - Customer Drw			sheet 1 of 3			

A

B

C

D

PRODUCT NO.	ROWS	LOW POWER										SIGNAL								LOW POWER										E2								
		E1	P15	P14	P13	P12	P11	P10	8	7	6	5	4	3	2	1	P9	P8	P7	P6	P5	P4	P3	P2	P1													
10106268-0F08001LF	D C B A		L	R	L	R	L	R	L	R	L	R	L	R	L	R	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	


CODE	DESCRIPTION
E	STD SIGNAL CONTACT
HA	METAL HOLD DOWN
LR	STD LOW POWER CONTACT (3.43)
X	OMITTED

A

B

C


D

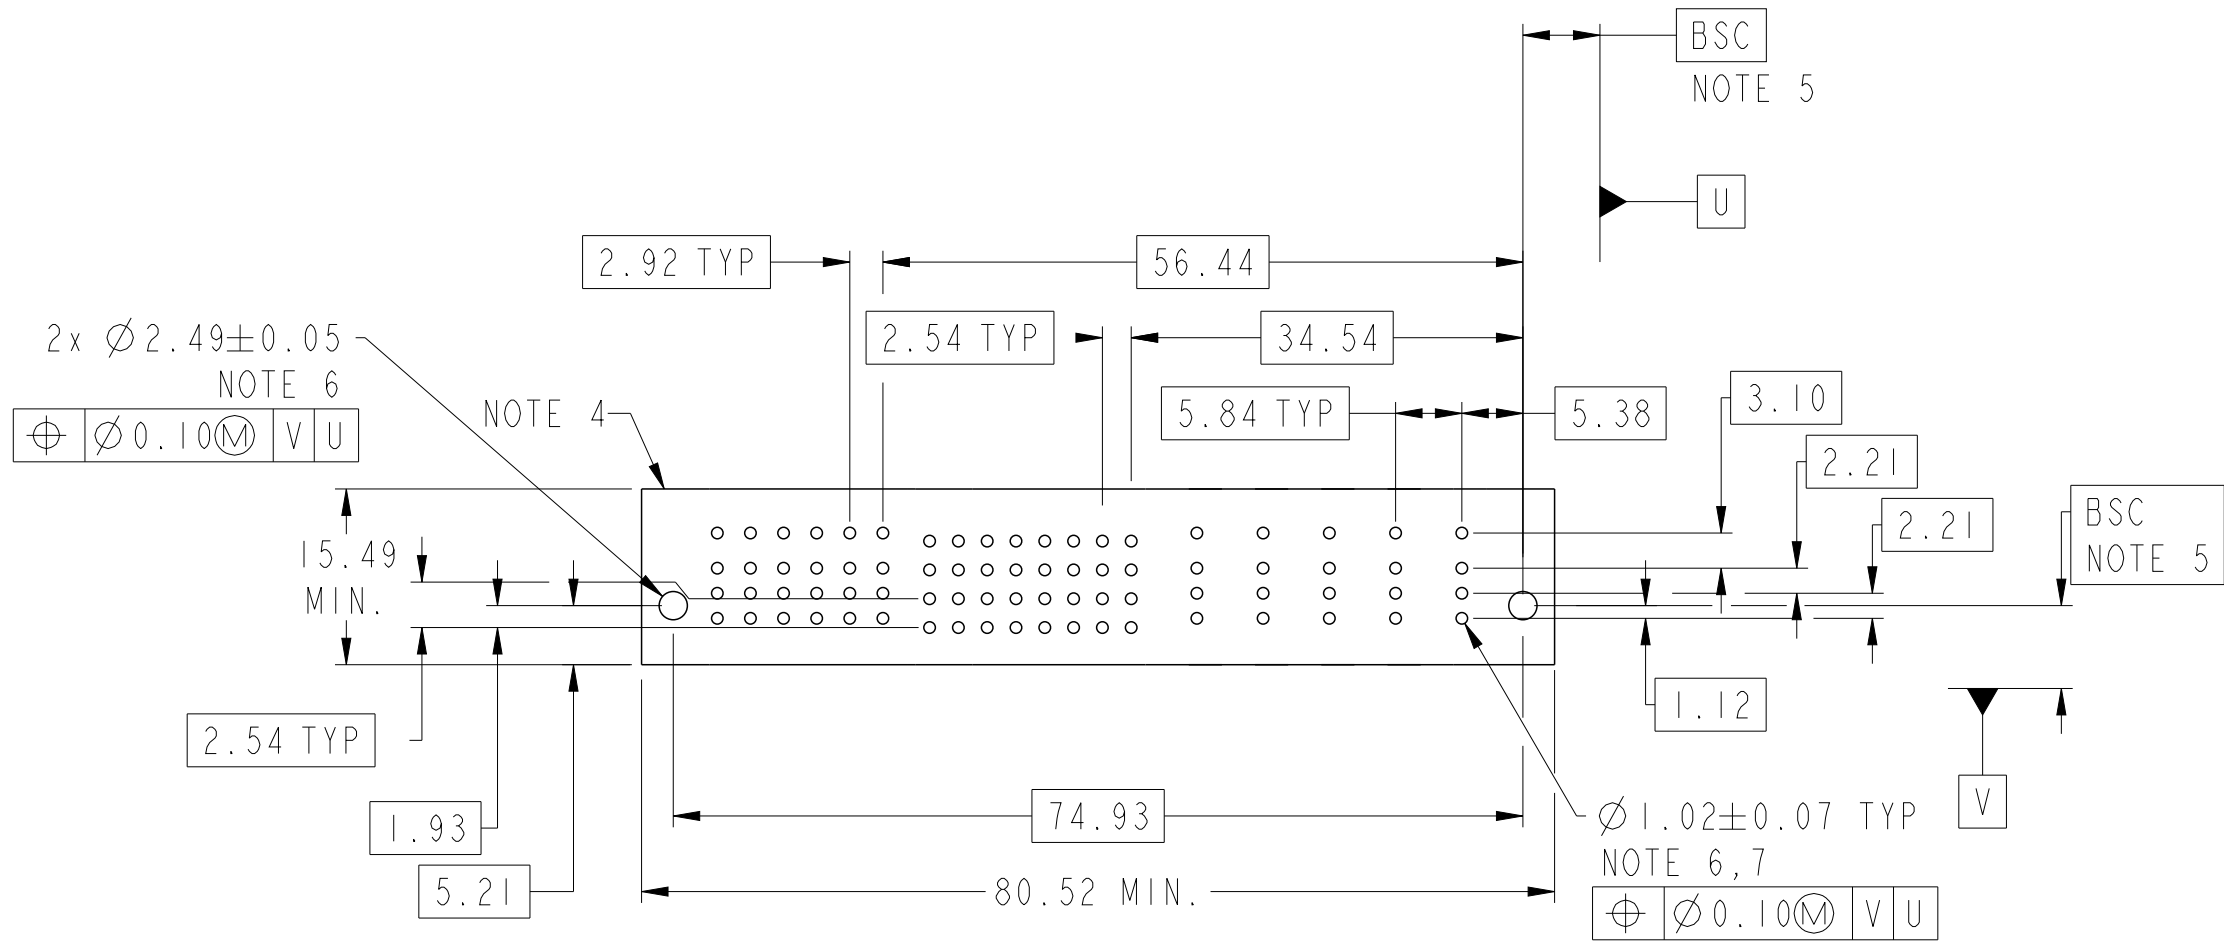

spec ref				dr		Zhan Rainbow	2017/06/01		projection		MM		size		A3		scale		3:2										
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Zhan Rainbow	2017/06/07						ecn no						-								
ISO 406						chr		Fancy Zhang	2017/06/07						rel level						Released								
ISO 1101						appr		Pei-Ming Zheng	2017/06/07						product family						PowerBlade+								
surface		linear		0.X		±0.50		Amphenol FCI		title		9LP + 32S + 6LP						dwg no		10106268-0F08001						rev		A	
				0.XX		±0.25																							
				0.XXX		±0.10																							
ISO 1302		angular		0°		±2°		www.fci.com		cat. no.		Product - Customer Drw						sheet 2 of 3											

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND
END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR
OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT
TO PRODUCT FUNCTION.
- 10) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 11) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr		Zhan Rainbow	2017/06/01	projection		MM		size		A3	scale		1:1									
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Zhan Rainbow	2017/06/07					ecn no				-								
ISO 406						chr		Fancy Zhang	2017/06/07					rel level				Released								
ISO 1101						appr		Pei-Ming Zheng	2017/06/07					product family				PowerBlade+								
surface				linear		0.X		±0.50		Amphenol FCI		title		9LP + 32S + 6LP		dwg no		10106268-0F08001		rev		A				
																							0.XX		±0.25	
																							0.XXX		±0.10	
ISO 1302		angular		0°		±2°		www.fci.com		cat. no.		Product - Customer Drw				sheet 3 of 3										