
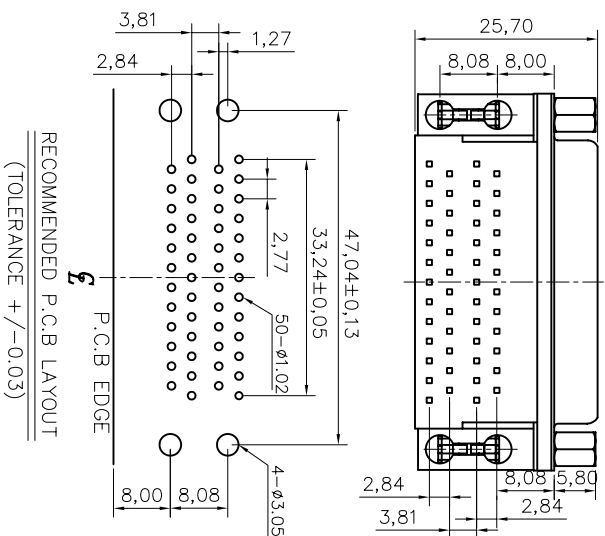


This document is the property of Amphenol Corporation and is intended for use only by the recipient. It is not to be distributed, reproduced or used, in whole or in part, for manufacturing or sales by anyone other than Amphenol Corporation. The recipient is to be responsible for the proper use of this document or to use any information in this document.

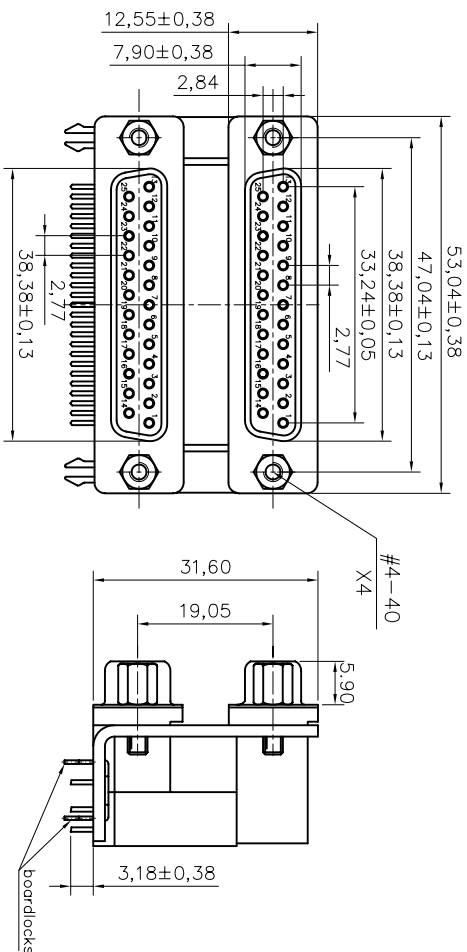

Customer drawing

REVISONS			
STM	EON	DESCRIPTION	DATE
1			07/28/08

D-SUB TECHNICAL DATA

- SHELL : Steel, 100u" min. tin over 50u" min nickel.
BODY : Glass filled thermoplastic.
CONTACTS : Flame retardant to UL94 V-0 Color Black
CONTACTS : Copper alloy
BOARDLOCK : Flash gold over 50u" min nickel on mating area.
BOARDLOCK : 100u" min tin over 50u" min nickel on solder area
SCREWLOCK : Copper alloy, 100u" min tin over 50u" min nickel
BRACKET : Brass, 50u" min nickel.
ELECTRICAL : Voltage rating :250 V Rms to 60 Hz
Current rating :3A
Withstanding Voltage >1000 V Rms to 50 Hz for one minute
Insulation resistance >5000 M Ohms
Contact resistance 20 mOhms max.
CLIMATIC : Temperature range -55 °C up to 125°C
MARKING : Amphenol...(Series No.)
Commercial reference
Manufacturing date

PRODUCT CODE

L 17H 2 6 6 0 1 3 1

- RoHS Compliance
- Spacing Between Ports:
2: F=19.05mm
G=31.60mm
- Top Connector Type:
6=25 Female
- Bottom Connector Type:
6=25 Female
- Flange Mounting Option:
1=Removable screwlock 4-40
- Board Mounting Option:
3=Quad Arrowhead Boardlock (Boardlock x4)
- Front Shell Finish:
1=Tin over nickel
- Contact Finish:
0=Flash gold

UNLESS OTHERWISE SPECIFIED			
TOLERANCES	U.S.	METRIC	APPROVAL
XX	±	0.50	DRAWN
XX	±	0.30	CHECKED
XX	±	0.20	DATE
ANGLES	±	2	DATE
FOR MATERIALS AND FINISHES			
SEE NOTES			
REMOVE SHARP EDGES			
DIMENSIONS			
TOLERANCES			
INCHES			
MILLIMETERS			
DRAWING NO.			
SCALE			
SHEET 1 OF 1			

Amphenol®

Dual port connector, 17H series