

EAO – Your Expert Partner for Human Machine Interfaces

ECN-S14180002MB

14-955.1 - Front bezel set, flush design



Attention: The preview is based on a sample product. This can differ from your current configuration.

Mounting

Mounting cut-out
Design

Ø 30,5 mm
flush

Front

Front shape
Front dimension
Front bezel colour
Front bezel material

round
Ø 35 mm
natural anodized
Aluminium

Other Attributes

Weight

0,015 kg

IP-Rating

Front protection

IP67

Actuator


Housing colour
Housing material

black
Plastic

EAO – Your Expert Partner for Human Machine Interfaces

ECN-S14180002MB

Mounting cut-outs



Additional information

The colour of anodized aluminium parts can vary due to technical production reasons

EAO – Your Expert Partner for Human Machine Interfaces

ECN-S14180002MB

14-131.012 - Illuminated pushbutton actuator



250 VAC

尺寸见页5

灯罩、印字板、印字盖和前圈分开


Ø 29 mm

品名	瞬时性动作	持续性动作		指定所需“索引” 见折页1的采购指南	“索引”			嵌入长度 (mm)
					壳体颜色	触点材料	接头	
指示器	-	-		<u>14-030.</u>	0	0	<input type="checkbox"/>	30
照明按钮 1开关元件	x	-		<u>14-131.</u>	0	<input type="checkbox"/>	<input type="checkbox"/>	37,5
照明按钮 2开关元件	x	-		14-132.	0	<input type="checkbox"/>	5	45
照明按钮 3开关元件	x	-		14-133.	0	<input type="checkbox"/>	5	52,5
照明按钮 4开关元件	x	-		14-134.	0	<input type="checkbox"/>	5	60
照明按钮 1开关元件	-	x		<u>14-271.</u>	0	<input type="checkbox"/>	<input type="checkbox"/>	37,5
照明按钮 2开关元件	-	x		<u>14-272.</u>	0	<input type="checkbox"/>	5	45
照明按钮 3开关元件	-	x		14-273.	0	<input type="checkbox"/>	5	52,5
照明按钮 4开关元件	-	x		14-274.	0	<input type="checkbox"/>	5	60

EAO – Your Expert Partner for Human Machine Interfaces

ECN-S14180002MB

704.609.9 - Marking plate for lens round flat

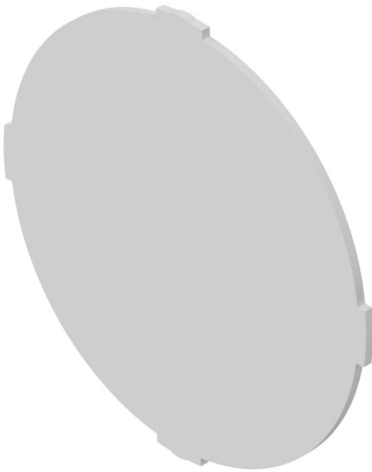

Attention: The preview is based on a sample product. This can differ from your current configuration.

Other Attributes

Weight	0,001 kg
Marking plate material	Plastic
Marking plate colour	white
Marking plate optics	translucent
Marking plate illumination	illuminative
height	round, flush

EAO – Your Expert Partner for Human Machine Interfaces

ECN-S14180002MB

704.602.6 - Lens plastic round flat



Attention: The preview is based on a sample product. This can differ from your current configuration.

Other Attributes

Weight	0,001 kg
Dimension	Ø 23.7 mm
height	round, flush

Operating-/Indication part

Lens optics	transparent
Lens colour	blue
Lens material	Plastic
Lens profile	flat
Lens illumination	illuminative

EAO – Your Expert Partner for Human Machine Interfaces

ECN-S14180002MB

10-2112.1066 - Single-LED



Attention: The preview is based on a sample product. This can differ from your current configuration.

Other Attributes

Weight	0,001 kg
Operation current	7 / 14 mA ± 15 %
Operating voltage	24 V AC/DC $+10$ %

Illumination

Socket	T5.5
LED colour	blue


Optics

Lumi. intensity	650 mcd
Dom. wavelength	470 nm

EAO – Your Expert Partner for Human Machine Interfaces

ECN-S14180002MB

Dimensions

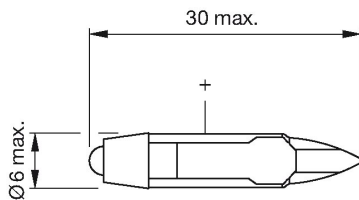

Additional information

When using AC/DC types with AC operation, slight flickering can occur.
The specified versions are built with a protection diode (half wave)
Luminous intensity data of the LEDs on direct voltage
Electrical and optical data are measured at 25 °C

rectifier) in series and the LED

Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination

For supply voltages above 48 V, it is necessary to use a voltage reduction element (external series resistor or transformer)