



RSE-32.768-12.5-B-TR
RALTRON ELECTRONICS

Buy Now



Looking for a discount?

[Check out our current promotions!](#)

Give us a call

1-855-837-4225

International: 1-415-281-3866

Email Us

Sales and New Orders: sales@verical.com

Order Support: support@verical.com

Suppliers: [Visit our seller page](#)

Company Address

Arrow Electronics, Inc
9201 East Dry Creek Road
Centennial, CO 80112

This coversheet was created by Verical, a division of Arrow Electronics, Inc. ("Verical"). The attached document was created by the part supplier, not Verical, and is provided strictly 'as is.' Verical, its subsidiaries, affiliates, employees, and agents make no representations or warranties regarding the attached document and disclaim any liability for the consequences of relying on the information therein. All referenced brands, product names, service names, and trademarks are the property of their respective owners.

FEATURES

- SUITABLE FOR TIME OF DAY CLOCK APPLICATIONS
- LOW FREQUENCY RANGE
- EXCELLENT FOR AUTOMATIC AND HIGH DENSITY SURFACE MOUNTING



SERIES RSE A, B, C, D

SPECIFICATIONS


NOMINAL FREQUENCY	32.768 KHz	24.00 TO 350.00 KHz	351.00 KHz TO 615.00 KHz
FREQUENCY TOLERANCE	±20 PPM MAXIMUM (±50 PPM AND ±100 PPM AVAILABLE)		
TURNOVER TEMPERATURE	±25°C ±5°C	±25°C ±8°C	±25°C ±15°C
TEMPERATURE COEFFICIENT	(-0.035 ± 0.008) PPM/ Δ °C ²		
LOAD CAPACITANCE	6.0 TO 12.5 pF		
EQUIVALENT SERIES RESISTANCE (ESR)	50 K OHM MAXIMUM	50 K OHM MAXIMUM	20 K OHM MAXIMUM
DRIVE LEVEL	1.0 μW MAXIMUM		
SHUNT CAPACITANCE	1.0 pF TYPICAL	0.95 pF TYPICAL	0.9 pF TYPICAL
AGING (FIRST YEAR)	±5 PPM MAXIMUM		
OPERATING TEMPERATURE RANGE	-40°C TO +85°C		
STORAGE TEMPERATURE RANGE	-55°C TO +125°C		
SHOCK RESISTANCE	±5 PPM MAXIMUM 75 cm DROP TEST IN 3 AXES ONTO A HARD SURFACE OR 3000 g x 0.3 ms x ½ SINEWAVE IN 3 AXES		
SOLDER REFLOW CONDITIONS	230 °C MAXIMUM FOR 20 s MAXIMUM		




OUTLINE DRAWINGS

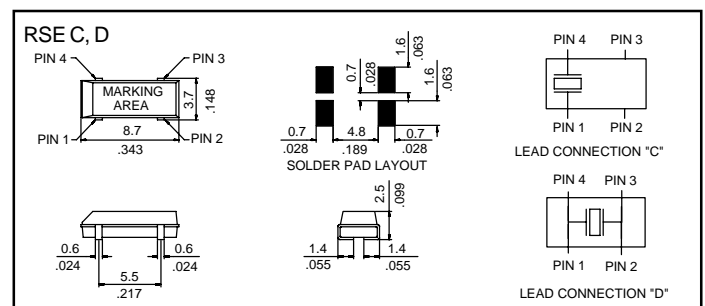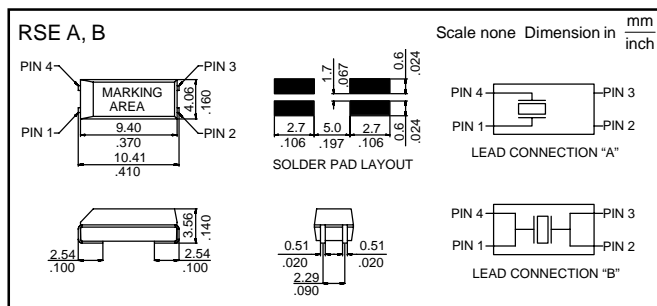


REFLOW SOLDERING PROFILE

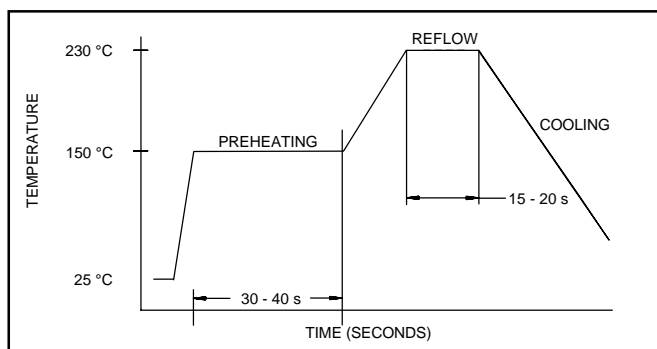

CARRIER TAPE DIMENSIONS

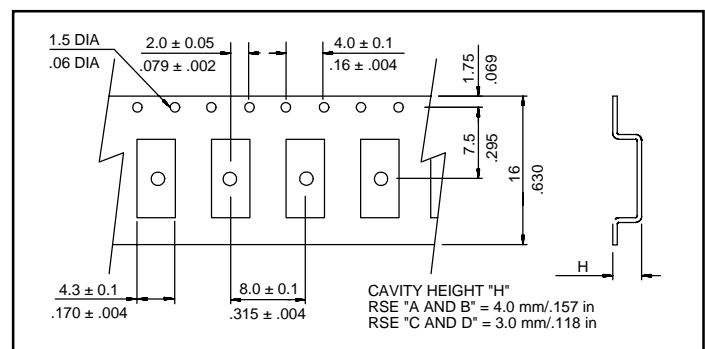

FREQUENCY VS. TEMPERATURE CURVE

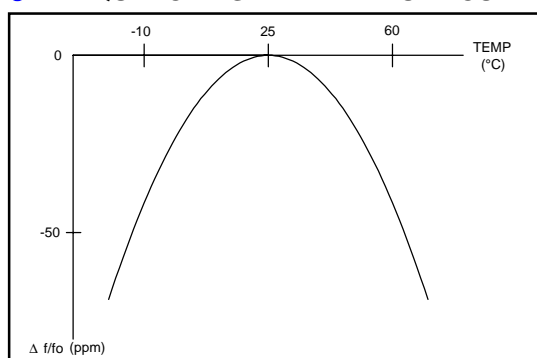

PACKAGING

330mm REEL DIAMETER
16mm TAPE WIDTH, 8mm PITCH
QUANTITY: RSE A OR B 2000 PIECES PER REEL
RSE C OR D 3000 PIECES PER REEL

PART NUMBERING SYSTEM

HOLDER TYPE	FREQUENCY	LOAD CAPACITANCE	CIRCUIT TYPE	TAPE AND REEL
RSE	IN KHz	6 OR 12.5 pF	A B C D	TR

EXAMPLE: RSE-32.768-12.5-B-TR