
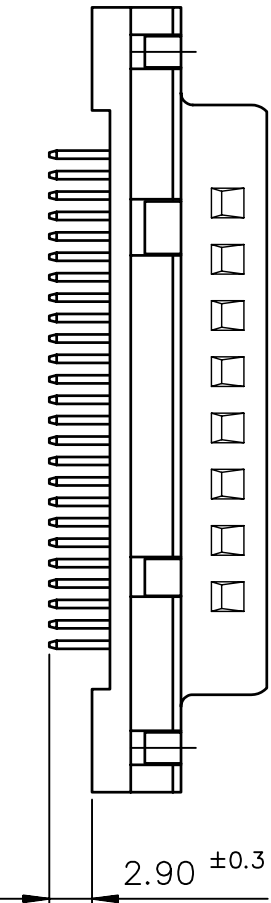
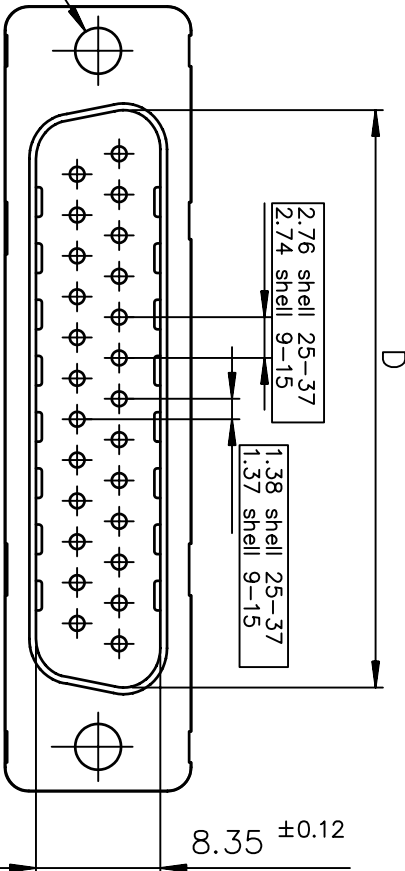
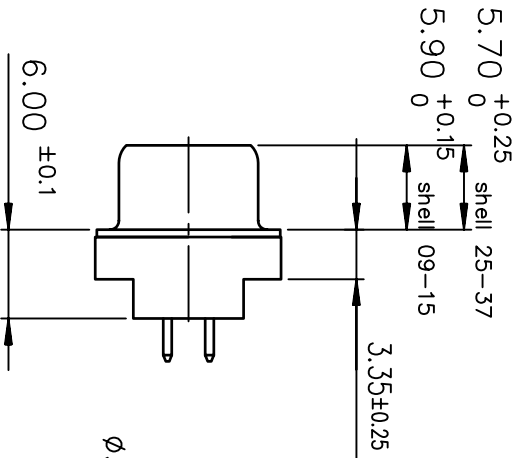


1


2

3


4

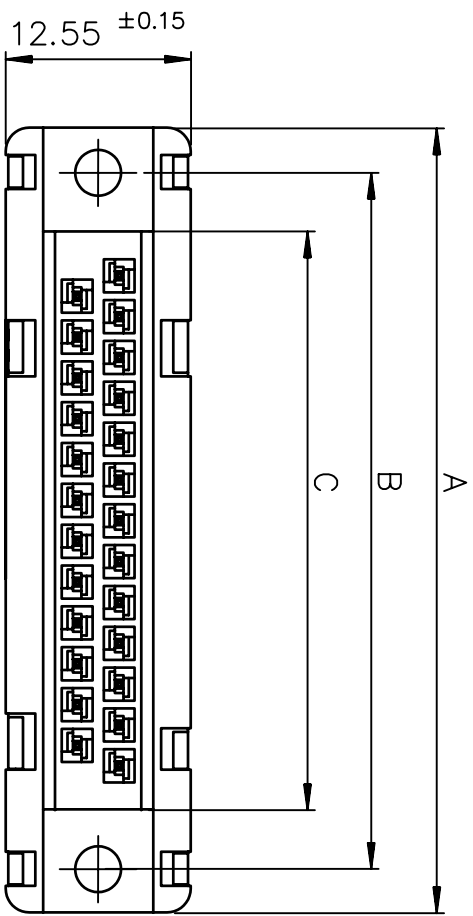

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

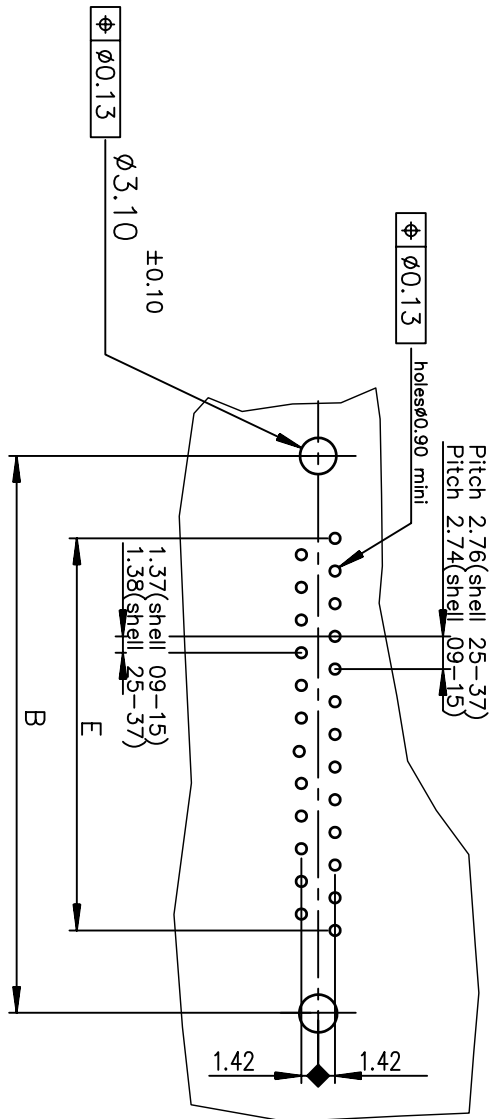

SECTION TERMINAISON CONTACT



TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.PA00
15	39.14	33.32	25.18	25.12	19.18	D15P24A.PA00
25	53.03	47.04	39.12	38.84	33.12	D25P24A.PA00
37	69.32	63.50	55.68	55.30	49.68	D37P24A.PA00

Plating: 4 --> flash AU
Plating: 6 --> 0.76» AU

LEAD FREE PART NUMBER


SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.PA00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24A.PA00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24A.PA00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24A.PA00LF

Plating: 4 --> flash AU
Plating: 6 --> 0.76» AU

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com			surface ISO 1302		✓	tolerance std ISO 406 ISO 1101		projection 	mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED										
Dr	JARRY	1992-09-11	ANGULAR	LINEAR		0.X	±0.1	size	A3	Scale 2
Eng	PESSON	1992-09-11				0.XX	±0.1			
Chr	NIRMAL GEORGE	2009-11-24	0.XX' ±2°		0.XXX	±0.1	ECN	109-0268		
Appr	SUDHIR VARMA	2009-11-24	Product family				D-SUB	Spec ref -		
MALE CONNECTOR DELTA D STD EUROPE			D-SUB							
straight,solder type for PCB 1.6mm			Spec ref -							
title			Dwg no							
catalog no			-							
FCI			CUSTOMER							
			sheet 1 of 1							
			Rev.							
			K							
			C01-8646-0095							

MALE CONNECTOR DELTA D STD EUROPE

straight,solder type for PCB 1.6mm

Rev.

C01-8646-0095

K